

XD4**XD4 – 24V ELECTRONIC LIFT TRUCK**


For the typical lateral handling is ideal for the transport of long loads, like aluminium profiles, iron bars, pipes and wooden bars.

STANDARD EQUIPMENT

- High-frequency electronic plant 24V with microprocessor fault research
- 24V 160Ah traction battery
- Electronic 24V 30A battery charger with microprocessor
- Fixed forks 1150 mm. long
- 200 mm. free lift (except for 3500 mm. liftings)
- Ignition key switch
- Forks and front directional wheel control by distributor at 2 levers
- Digital hour-meter
- Double chromed lateral pistons
- Electric limit switch
- Braking in release in contrallow
- Electromagnetic parking brake
- Shock absorber on driving-wheel
- Extruded masts with lateral contrast bearings
- Emergency push-button
- Safety push-button for accident prevention
- Automatic speed reduction
- Stabilising wheels with extra-heavy brackets
- Manual release of traction group
- Acoustic warning signal
- Battery discharged warning indicator
- Shock resistant ergonomic steering
- Total visibility



The mast with special steel profiles assures excellent performances by using the track for the usual and continuous movement of heavy loads.



The trucks are fitted with a shock absorber system that ensures perfect contact of the driving wheel with the floor, even in the case of deep bumps.



model	XD4 1216	XD4 1516	XD4 1225	XD4 1525	XD4 1230	XD4 1530	XD4 1235	XD4 1535
Q kg	1200	1500	1200	1500	1200	1500	1200	1500
C mm	450	450	450	450	450	450	450	450
I mm	950	950	950	950	950	950	950	950
L mm	1780	1810	1810	1810	1810	1810	1810	1810
X mm	310	330	330	330	330	330	330	330
X2 mm	175	175	175	175	175	175	175	175
Y mm	1285	1305	1305	1305	1305	1305	1305	1305
L2 mm	840	860	860	860	860	860	860	860
M mm	350/1000	350/1000	350/1000	350/1000	350/1000	350/1000	350/1000	350/1000
N mm	160	160	160	160	160	160	160	160
h1 mm	1990	1740	1990	1990	1990	1990	2250	2250
h2 mm	1450	200	200	200	200	200	/	/
h3 mm	1600	2500	3000	3500	3000	3500	3000	3500
h4 mm	2070	2970	3470	3970	3470	3970	3470	3970
B mm	1620	1620	1620	1620	1620	1620	1620	1620
WA mm	1510	1510	1510	1510	1510	1510	1510	1510




Diagram representing the position variation of the load transporter with the variation of the same.





Diagram of maximum loads regarding the lifts.

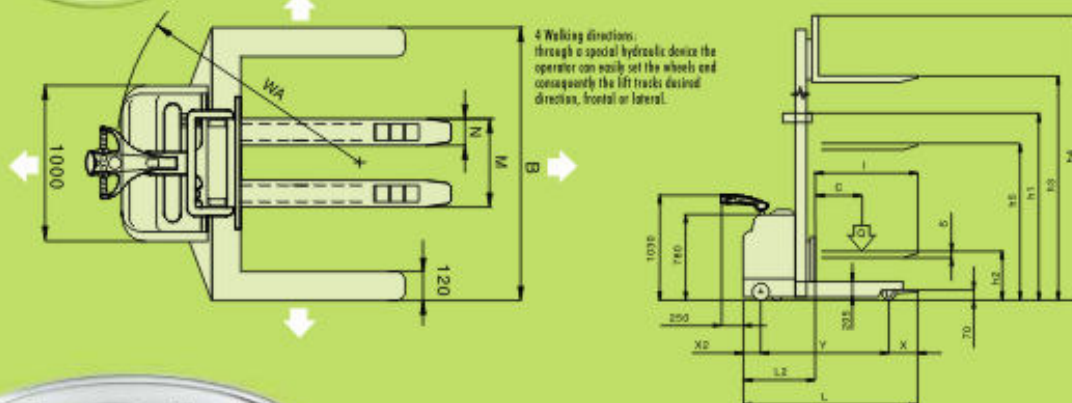

L I F T T R U C K S